


RID Type Core

命名表示 / Ordering Core System

TN25H RID - A - B - C - D H n D

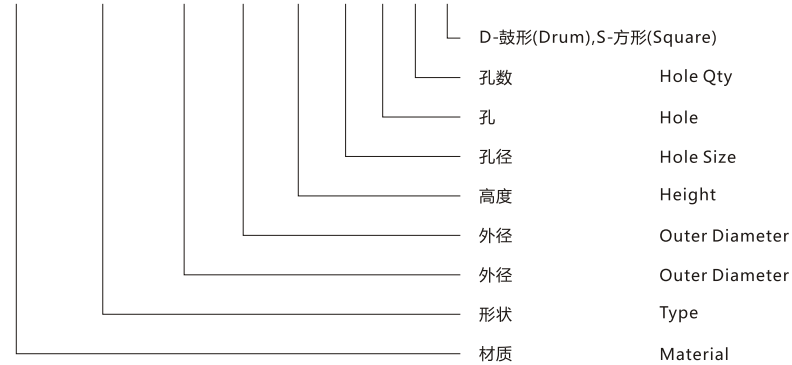

- 适用材质 / Available Material :
TN12B/ TN25H/ TN40H/ TN65H/ TN100B/ TN200B etc.
- 使用范围 / Application :
主要适用于宽频滤波器、平衡切换、匹配变压器等
Wide Band, Balance/Unbalance, Balun Transformer etc.

型号 TYPE	尺寸 Dimensions (mm)					图例 FIG
	A(A1)	B	C(C1)	D	E	
RID-3.2-1.3-2.0-0.7H2	3.20±0.1	1.30±0.1	2.00±0.1	0.70±0.1	1.30±0.1	1
RID-3.4-1.3-2.0-0.65H2S	3.40±0.1	1.30±0.1	2.00±0.1	0.60±0.1	1.65±0.1	2
RID-3.4-1.9-2.0-0.9H2	3.40±0.3	1.90±0.2	2.00±0.15	0.90±0.1	1.40±0.2	3
RID-3.5-2.0-2.0-0.8-H2	3.50±0.2	2.00±0.2	2.00±0.2	0.80±0.1	1.40±0.2	3
RID-3.5-2.0-2.36-0.8H2	3.50±0.2	2.00±0.2	2.36±0.2	0.80±0.1	1.40±0.2	3
RID-3.5-2.0-3.0-0.8H2	3.50±0.2	2.00±0.2	3.00±0.2	0.80±0.1	1.40±0.2	3
RID-4.9-2.2-3.0-0.95H2S	4.90±0.2	2.20±0.1	3.00±0.2	0.95±0.1	2.50±0.2	2
RID-5.0-3.0-2.0-1.25H2	5.00±0.2	3.00±0.2	2.00±0.2	1.25±0.15	2.50±0.2	3
RID-5.0-3.0-3.0-1.25H2	5.00±0.2	3.00±0.4	3.00±0.4	1.25±0.3	2.50±0.2	3
RID-5.1-2.6-4.0-1.4H2	5.10±0.3	2.60±0.3	4.00±0.3	1.40±0.2	2.50±0.2	3
RID-5.2-2.6-4.0-1.3H2	5.20±0.3	2.60±0.3	4.00±0.3	1.30±0.2	2.50±0.2	3
RID-7.0-4.1-6.2-1.8H2	7.00±0.25	4.10±0.15	6.20±0.25	1.80±0.1	2.90±0.1	3
RID-12-6.5-4-4H2	12.00±0.3	6.50±0.5	4.00±0.2	4.00±0.2	6.00±0.3	3
RID-6-10-0.9H6	6.00±0.25	10.00±0.3	0.90±0.12			4
RID-9.8-4.85-6.0-2.5H2S	9.80±0.2	4.85±0.2	6.00±0.2	2.50±0.2	4.95±0.2	2
RID-13.3-7.5-6.6-3.8H2	13.30±0.6	7.50±0.35	6.60±0.25	3.80±0.25	5.70±0.25	3
RID-13.3-7.5-10.3-3.8H2	13.30±0.6	7.50±0.35	10.30±0.25	3.80±0.25	5.70±0.25	3
RID-13.3-7.5-13.4-3.8H2	13.30±0.6	7.50±0.35	13.40±0.25	3.80±0.25	5.70±0.25	3