

FIG.1




FIG.4




FIG.6

PQ 型 / PQ Core

型号 TYPE	图例 FIG.	尺寸 Dimensions ( mm )						
		A	B	C	D	E	F	G
PQ16.4/11.6/11.2A	1	16.4±0.35	5.8±0.15	11.2±0.3	7±0.25	14min	3.45±0.15	9.6min
PQ17.4/22.6/14	1	17.4±0.35	11.3±0.2	14±0.3	8.8+0/-0.4	15min	8.4±0.15	9.7±0.5
PQ20.5/20.2/14	1	20.5±0.4	10.2+0/-0.2	14±0.4	8.8±0.2	18±0.4	7+0.3/-0	12min
PQ20/10E	1	20.5±0.4	4.9±0.1	14.0±0.4	8.8±0.2	18.0±0.4	2.65±0.2	12.0min
PQ20/12	1	20.5±0.4	6±0.1	14.0±0.4	8.8±0.2	18.0±0.4	3.05±0.15	12.0min
PQ20/14	1	20.5±0.4	7.1±0.2	14.0±0.4	8.8±0.2	18±0.4	4.205±0.2	
PQ20/16	1	20.5±0.4	8+0.2/-0	14±0.4	8.8±0.2	18±0.4	5+0.3/-0	12min
PQ20/20C	1	20.5±0.4	10.2+0/-0.2	14±0.4	8.8±0.2	18±0.4	7+0.3/-0	12min
PQ20/20	6	21.3±0.4	10.1±0.1	14.0±0.4	8.8±0.2	18.0±0.4	7.15±0.15	12.0min
PQ22.5/17.4/15	4	22.5±0.45	8.7±0.1	15±0.3	9.4+0.1/-0.2	18.55min	5.6+0.2/-0.1	13min
PQ22.8/17.3/14.4	1	22.8±0.4	8.65±0.1	14.4±0.4	8.8±0.2	20.3±0.4	5.7±0.15	15.6±0.4
PQ25/18B	4	25±0.4	9±0.2	14.35±0.25	9.7±0.2	19.9min	6±0.2	15.8min
PQ26/12/16C	4	26±0.4	6.25±0.15	16.3±0.2	9.95±0.15	19.9min	3.2±0.15	16min
PQ26/15/16B	4	26±0.4	7.6+0.18/-0	16.3±0.2	9.9±0.15	19.9min	4.65min	16min
PQ26/18.6/16.3	4	26±0.4	9.3±0.15	16.3±0.2	9.9±0.15	19.9min	6±0.15	16min
PQ26/18/16E	4	26±0.4	9.2±0.15	16.3±0.2	9.9±0.15	19.9min	5.9±0.15	16min
PQ26.5/11/19A	1	26.5±0.45	5.4+0.2/-0	19±0.45	12±0.2	22min	2.65+0.3/-0	15.5min
PQ26.5/15.3/19	1	26.5±0.45	7.63±0.12	19±0.45	12±0.2	22.5±0.45	3.3±0.15	15.5+0.8/-0
PQ26.5/17.8/19	1	26.5±0.45	9+0/-0.25	19±0.45	12.2+0/-0.4	22min	4.3+0.3/-0	15.5min
PQ26.5/18.8/19A	1	26.5±0.4	9.4±0.13	19±0.4	12±0.2	22.5+0.4/-0.3	5.08±0.15	15.5min
PQ26.5/20.4/19A	1	26.5±0.45	10.2±0.15	19±0.45	12±0.2	22.5±0.45	5.85±0.15	15.5min

C1	Ae	Le	Amin	Ve	AL(±25%)				重量 g /PRS
					TP4	TP4A	TP4W	TPW33	
0.70	38.98	27.33	37.60	1065.3	2500	2600	2900	3000	5.53
0.81	58.99	47.59	56.44	2807	2500	2600	3100	3300	14.57
0.74	61.22	45.53	59.13	2787.3	2700	2800	3300	3500	14.46
0.48	54.44	26.14	45.10	1422.8	3000	3100	3600	3700	7.38
0.48	60.87	29.14	59.13	1773.6	3700	3800	4400	4700	9.20
0.56	60.64	33.66	58.03	2041.2	3300	3400	4000	4200	10.59
0.61	61.09	37.53	59.13	2292.9	3100	3200	3800	4000	11.90
0.74	61.22	45.53	59.13	2787.3	2700	2800	3300	3500	14.46
0.70	64.81	45.51	60.01	2949.5	2800	2900	3400	3600	15.31
0.57	69.70	40.00	64.36	3385	3300	3400	3900	4200	17.57
0.70	62.74	43.71	57.06	2742.34	2700	2800	3300	3500	14.23
0.60	69.74	42.07	59.52	2933.9	2900	3000	3500	3700	15.23
0.43	85.28	36.62	77.76	3123.06	4200	4300	5000	5400	16.21
0.49	77.00	37.87		2916	4100	4200	4900	5200	15.13
0.50	92.92	46.70	76.98	4339.4	3500	3600	4200	4500	22.52
0.46	94.96	43.46	76.98	4126.6	3700	3800	4500	4700	21.41
0.30	97.74	29.74	74.19	2907	4600	4800	5500	5800	15.09
0.29	119.74	35.10	113.10	4202.8	6300	6500	7600	8000	21.81
0.33	120.88	39.83	113.10	4814	5800	6000	7000	7400	24.98
0.34	119.00	46.30	113.10	5490	5200	5400	6300	6700	28.49
0.38	119.91	45.30	113.10	5432.4	5300	5400	6400	6800	28.19

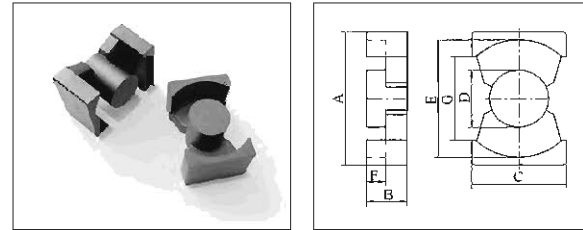


FIG.1

**PQ 型 / PQ Core**

型号 TYPE	图例 FIG.	尺寸 Dimensions ( mm )							重量 g /PRS
		A	B	C	D	E	F	G	
PQ26.5/25/19B	1	26.5±0.45	12.5±0.125	19±0.45	12±0.2	22.5±0.3	8.05±0.15	15.7min	
PQ26.5/25/19E	1	26.5±0.45	12.45±0.1	19±0.45	12±0.2	22.5±0.45	8.15+0.2/-0.1	16.2min	
PQ26/15A	1	26.5±0.45	7.4±0.15	19±0.45	12±0.2	22.5±0.45	3.2min	15.5min	
PQ26/16C	1	26.5±0.45	8+0/-0.2	19±0.45	12.2+0/-0.4	22.5±0.45	3.75±0.15	15.5min	
PQ26/18	1	26.5±0.45	9+0/-0.25	19.0±0.45	12.2+0/-0.4	22.5±0.45	4.3+0.3/-0	15.5min	
PQ26/19	1	26.5±0.45	9.7+0/-0.25	19.0±0.45	12.2+0/-0.4	22.5±0.45	5.1+0.5/-0	15.5min	
PQ26/20L	1	26.5±0.45	10.45±0.2	19.0±0.45	12.0±0.3	22.5±0.45	6.2±0.2	15.5min	
PQ26/21B	1	26.5±0.45	10.35+0/-0.25	19.0±0.45	12.0±0.2	22.5±0.45	5.9±0.15	15.5min	
PQ26/21I	1	26.5±0.45	10.65±0.15	19±0.45	12±0.2	22.5±0.45	6.3±0.2	15.5min	
PQ26/22H	1	26.5±0.45	10.75+0.3/-0.1	19±0.45	12±0.2	22.5±0.45	6.7+0.2/-0.1	15.5min	
PQ26/23B	1	26.5±0.45	11.25±0.2	19±0.45	12.0±0.2	22.05min	6.93±0.15	15.5min	
PQ26/25M	1	26.5±0.45	12.5+0/-0.25	19±0.45	12±0.3	22.5±0.45	8.05±0.15	15.5min	
PQ27/20F	6	26.5+1.2/-0.5	10.05±0.15	19±0.5	12±0.2	22.5±0.45	6.25±0.15	15.4min	
PQ26/20A	1	26.6±0.5	9.95+0.25/-0	19.0±0.5	12.0±0.3	22.0min	5.75±0.15	15.2min	
PQ26/21A	1	26.6±0.5	10.45±0.2	19±0.5	12±0.3	22min	6.2±0.2	15.2min	
PQ26.8/24.8/19	1	26.8±0.45	12.5+0/-0.25	19±0.45	12±0.3	22.8±0.45	8.05±0.2	16min	
PQ26.9/24.8/19	6	26.885±0.825	12.37±0.125	19±0.46	12±0.19	22.05min	8.05±0.15	15.49min	
PQ26/14B	1	26.95+0/-0.9	7+0/-0.2	19.45+0/-0.9	12.2+0/-0.4	22.05min	2.5±0.15	15.5min	
PQ26/16A	1	26.95+0/-0.9	8.0±0.2	19.45+0/-0.9	12.2+0/-0.4	22.05min	3.5±0.1	15.5min	
PQ27/20.8/19	1	27±0.45	10.4±0.3	19±0.5	12±0.3	22.5min	6.2±0.2	16.2min	
PQ27/25E	1	27±0.45	12.5±0.3	19±0.5	12±0.3	22.5min	8.25±0.2	16.2min	

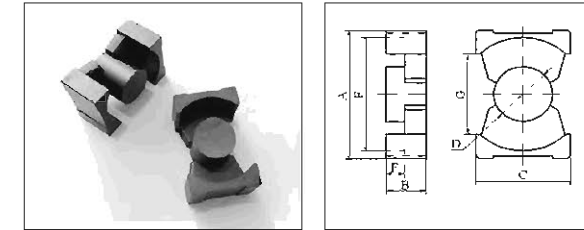


FIG.6

C1	Ae	Le	Amin	Ve	AL(±25%)				重量 g /PRS
					TP4	TP4A	TP4W	TPW33	
0.45	120.37	54.29	113.10	6534.9	4600	4700	5600	6000	33.91
0.46	119.33	54.47	113.10	6500	4600	4700	5600	6000	33.73
0.30	116.00	35.00	111.21	4070	6200	6400	7400	7900	21.12
0.31	117.91	36.62	113.10	4317.3	6200	6300	7400	7800	22.40
0.33	120.57	39.84	113.10	4804	5800	6000	7000	7400	24.93
0.36	118.86	43.11	113.10	5124.4	5500	5600	6600	7000	26.59
0.39	119.13	46.54	113.10	5544.1	5200	5300	6300	6700	28.77
0.38	119.71	45.46	113.10	5442.3	5300	5400	6400	6800	28.24
0.39	119.91	47.01	113.10	5647.3	5100	5300	6200	6600	29.31
0.41	118.01	48.48	112.59	5720.8	5000	5200	6100	6500	29.69
0.41	119.70	49.56	113.10	5932.2	4900	5100	6000	6400	30.79
0.45	119.75	54.03	113.10	6469.9	4600	4800	5600	6000	33.58
0.40	115.50	45.89	104.35	5300.3	4800	5000	5800	6200	27.51
0.37	120.51	44.80	113.10	5398.2	5300	5500	6400	6900	28.01
0.39	119.94	46.47	113.10	5573	5200	5400	6300	6700	28.92
0.46	119.44	54.42	113.10	6500	4600	4700	5600	6000	33.73
0.44	121.94	54.00	113.10	6585.2	4600	4700	5600	6000	34.17
0.27	120.45	32.04	113.10	3859.2	6700	6900	8000	8500	20.03
0.30	121.37	36.18	113.10	4390.7	6200	6400	7400	7900	22.79
0.40	118.55	47.02	113.10	5574.1	5100	5300	6200	6600	28.93
0.46	119.07	55.27	113.10	6580.9	4500	4700	5500	5900	34.15

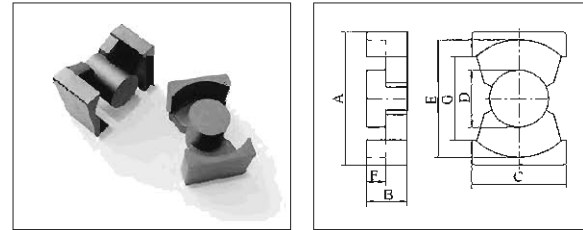


FIG.1

**PQ 型 / PQ Core**

型号 TYPE	图例 FIG.	尺寸 Dimensions ( mm )							重量 g / PRS
		A	B	C	D	E	F	G	
PQ27.3/24.7/19	6	27.3±0.46	12.35±0.125	19±0.45	12±0.2	22.5±0.45	8.05±0.15	15.5min	
PQ27/20	6	27.3±0.46	10.1±0.125	19.0±0.45	12.0±0.2	22.5±0.46	5.75±0.15	15.5min	
PQ27/20C	6	27.3±0.46	10.1±0.12	19±0.45	12±0.2	22.5±0.46	5.9min	15.5min	
PQ27/25A	6	27.3±0.46	12.35±0.125	19.0±0.45	12.0±0.2	22.5±0.46	8.05±0.15	15.5min	
PQ30/20B	1	30.0±0.5	9.9±0.1	20.5±0.4	13.3±0.2/-0.3	25.25±0.5	6.8±0.2	18min	
PQ30/25/20.5	1	30±0.5	12.5±0.2	20.5±0.5	13.3±0.25	25min	9.2±0.2	18min	
PQ30/26/20.5B	1	30±0.5	13±0.1	20.5±0.35	13.3±0.3	25.5±0.5	9.7±0.15	17.8min	
PQ32/11B	1	32±0.5	5.6±0.15	22±0.5	13.45±0.25	27.5±0.5	2.6±0.15	19min	
PQ32/14B	1	32.0±0.5	7.1±0.2	22.0±0.5	13.4±0.3	27.5±0.5	2.7±0.2	19min	
PQ32/16	1	32.0±0.5	8.05+0/-0.18	22.0±0.5	13.45±0.25	27.5±0.5	3.4+0.3/-0	19.0min	
PQ32/17.9/22	1	32±0.5	8.95±0.15	22±0.5	13.45±0.25	27.5±0.5	4.75±0.15	19min	
PQ32/18B	1	32±0.5	9.1+0/-0.25	22±0.5	13.7+0/-0.5	27.5±0.5	4.6+0.3/-0	19.0min	
PQ32/18F	1	32±0.5	9.1+0/-0.25	22±0.5	13.7+0/-0.5	27.5±0.5	4.6+0.4/-0	19.0min	
PQ32/20.1/22	1	32±0.5	10.05±0.15	22±0.5	13.4±0.3	27.5±0.5	6.5±0.2	19min	
PQ32/20M	1	32.0±0.5	10.25±0.15	22.0±0.5	13.4±0.3	27.5±0.5	5.75±0.15	19.0min	
PQ32/21.4/21.8	1	32±0.5	10.7±0.125	21.75±0.5	13.45±0.25	27.5±0.5	6.15±0.15	20.5min	
PQ32/21A	1	32.0±0.5	10.5±0.2	22.0±0.5	13.4±0.3	27.5±0.5	6±0.2	19min	
PQ32/21F	1	32.0±0.5	10.45±0.15	22.0±0.5	13.1±0.3	27.5±0.5	5.9±0.15	19.75min	
PQ32/25D	1	32.0±0.5	12.35±0.2	22.0±0.5	13.4±0.3	27.5±0.5	8.1±0.2	19min	
PQ32/25G	1	32.0±0.5	12.35±0.15	22.0±0.5	13.45±0.25	27.5±0.5	8.25±0.15	19.75min	
PQ32/30	1	32.0±0.5	15.3+0/-0.3	22.0±0.5	13.45±0.25	27.5±0.5	10.5+0.3/-0	19.0min	

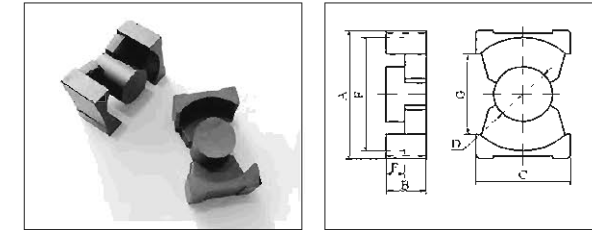


FIG.6

C1	Ae	Le	Amin	Ve	AL(±25%)				重量 g / PRS
					TP4	TP4A	TP4W	TPW33	
0.44	123.87	53.92	113.10	6679.1	4600	4800	5600	6000	34.66
0.36	124.08	44.94	113.10	5575.7	5300	5500	6400	6800	28.94
0.37	121.92	45.51	113.10	5548.5	5200	5400	6400	6800	28.79
0.44	123.86	53.92	113.10	6678.9	4600	4800	5600	6000	34.66
0.38	125.59	48.26	93.67	6061.5	4200	4300	5000	5400	31.46
0.45	130.17	58.54	99.65	7619.6	3800	3900	4700	5000	39.54
0.48	134.80	64.26	104.05	8662.96	3700	3800	4600	4900	44.96
0.28	132.37	36.49	93.59	4830.3	5100	5200	6100	6500	25.07
0.25	160.17	40.40	136.98	6470.9	6900	7200	8400	8900	33.58
0.27	161.45	44.11	137.58	7121.4	6600	6800	7900	8400	36.96
0.31	159.09	48.91	131.03	7780.5	5800	6000	7000	7500	40.38
0.31	159.46	48.96	131.81	7807	5800	6000	7100	7500	40.51
0.31	158.83	49.08	130.41	7795.4	5700	5900	7000	7400	40.45
0.35	150.60	54.87	132.31	8263.4	5300	5500	6500	7000	42.88
0.33	163.13	53.90	140.10	8792.7	5700	5900	7000	7500	45.63
0.35	161.80	56.33	141.38	9113.5	5600	5800	6800	7300	47.29
0.34	163.22	54.99	140.10	8975.6	5600	5800	6900	7400	46.58
0.34	159.42	54.97	134.78	8763.6	5400	5600	6600	7100	45.48
0.40	161.00	63.63	132.31	10243.5	4700	4900	5800	6300	53.16
0.40	158.97	64.20	127.91	10205.9	4600	4700	5600	6000	52.96
0.46	164.97	75.29	140.39	12420.1	4400	4500	5400	5900	64.45




FIG.1






FIG.3



PQ 型 / PQ Core

型号 TYPE	图例 FIG.	尺寸 Dimensions ( mm )							重量 g / PRS
		A	B	C	D	E	F	G	
PQ32/30.7/22	1	32.0±0.5	15.35±0.15	22.0±0.5	13.4±0.3	27.5±0.5	10.85±0.15	20min	
PQ32/35.5/22B	1	32+0.7/-0.3	17.75±0.2	22±0.5	13.4±0.3	27.5±0.5	13.25±0.2	19.5min	
PQ32/35A	1	32+0.7/-0.5	17.75±0.125	22.0±0.5	13.45±0.25	27.5±0.5	13.25±0.15	19min	
PQ32.2/31/22	1	32.2±0.5	15.5±0.2	22.0±0.5	13.45±0.25	27.5±0.5	10.9±0.2	19.3min	
PQ32.5/25.3/22	1	32.5±0.5	12.65±0.2	22±0.4	13.4±0.3	27.5±0.5	8.4±0.2	19min	
PQ32.5/30.2/22	6	32.5±1	15.1±0.2	22±0.5	13.45±0.25	27min	10.7±0.2	19min	
PQ32/18C	1	32.5+0/-1	9.55+0.3/-0	22.5+0/-1	13.4±0.3	27+1/-0	5.1+0.3/-0	19.0min	
PQ32/20.5/22G	1	32.5+0/-1.0	10.25±0.2	22.5+0/-1.0	13.4±0.3	27.0+1.0/-0	5.75±0.2	19.5min	
PQ32/30G	1	32.5+0/-1	15.15±0.2	22.5+0/-1	13.4±0.3	27+1/-0	10.65±0.2	19min	
PQ33/18.4/21A	4	33±0.5	9.2±0.1	20.6±0.4	12.9+0.35/-0.25	25.4min	5±0.15	19min	
PQ33/21	6	33.0±0.5	10.3±0.125	22.0±0.5	13.5±0.25	27.5±0.5	5.75±0.15	19min	
PQ33/30C	6	33±0.5	15.15±0.125	22±0.5	13.5±0.25	27.5±0.5	10.65±0.15	19min	
PQ33.5/20.6/22	6	33.5±0.5	10.3±0.125	22±0.5	13.5±0.25	28.3min	5.75±0.2	19.7min	
PQ33.5/33.5/24	1	33.8+0.2/-0.8	16.75±0.1	24±0.5	14.3±0.25	28.6±0.5	12.35±0.15	20.3min	
PQ34/15/29J	3	34+0.6/-0.25	7.3±0.15	29±0.6	20±0.3	26.8min	3.1+0.1/-0.2	6.45±0.2	
PQ35.1/30/26A	1	35+0.7/-0.5	15±0.2	26±0.4	14.6+0/-0.5	32±0.5	9.8±0.15	23.5min	
PQ35/35J	1	35.05±0.55	17.25+0.25/-0	26±0.5	14.35±0.25	31.5min	12.25min	23.5MIN	
PQ35.1/30.6/26	1	35.1±0.6	15.3±0.2	26.0±0.5	14.35±0.25	32.0±0.5	10.4±0.2	23.5min	
PQ35.1/31/26C	1	35.1±0.6	15.5±0.15	26±0.5	14.6+0/-0.5	31.5min	10.75±0.15	23.5min	
PQ35/16/26		35.1±0.6	8±0.15	26±0.5	14.35±0.25	32±0.5	4±0.15	23.5min	
PQ35/25C	1	35.1±0.6	12.5±0.15	26.0±0.5	14.4±0.25	32.0±0.5	7.6±0.2	23.5min	



FIG.4






FIG.6



C1	Ae	Le	Amin	Ve	AL(±25%)				重量 g / PRS
					TP4	TP4A	TP4W	TPW33	
0.47	163.24	76.54	140.10	12494.7	4300	4500	5400	5800	64.84
0.53	152.70	81.61	131.93	12461.45	3900	4000	4800	5200	64.67
0.52	165.98	86.65	140.57	14381.5	3900	4000	4900	5300	74.63
0.46	166.98	76.65	142.08	12798.2	4400	4500	5400	5900	66.42
0.40	164.12	64.85	133.15	10643.2	4700	4900	5800	6200	55.23
0.45	167.31	75.12	138.14	12568	4300	4500	5400	5800	65.22
0.32	162.30	51.62	138.54	8377.6	5900	6100	7100	7600	43.48
0.33	162.63	54.07	140.10	8793.6	5700	5900	7000	7500	45.63
0.46	164.32	75.29	140.10	12371.2	4400	4500	5400	5900	64.20
0.29	152.52	43.67	131.71	6661	6300	6500	7600	8100	34.57
0.32	170.78	53.95	143.14	9213.9	5900	6100	7200	7700	47.82
0.44	169.00	76.00	141.74	12732	4400	4600	5500	5900	66.07
0.33	165.80	55.33	142.74	9173.7	5700	5900	7000	7500	47.61
0.45	185.73	82.86	147.43	15389	4300	4400	5300	5700	79.86
0.13	282.05	37.66	217.53	10622.83					55.13
0.41	186.01	76.79	161.73	14283.5	5000	5200	6200	6700	74.12
0.48	183.00	87.79	161.73	16065.6	4400	4600	5600	6000	83.37
0.43	182.93	78.93	161.73	14439.4	4900	5000	6100	6500	74.93
0.44	180.48	80.26	160.31	14485.3	4800	4900	5900	6400	75.17
0.29	166.34	48.95	135.19	8141.5	6000	6200	7200	7700	42.25
0.36	183.46	66.60	162.86	12219.2	5600	5800	7000	7500	63.41




FIG.1




FIG.2




FIG.5





FIG.7




FIG.8





FIG.9

**PQ 型 / PQ Core**

型号 TYPE	图例 FIG.	尺寸 Dimensions ( mm )						
		A	B	C	D	E	F	G
PQ35/26	1	35.1±0.6	13±0.2	26.0±0.5	14.35±0.25	32.0±0.5	8.1±0.2	23.5MIN
PQ35/27D	1	35.1±0.6	13.5±0.2	26±0.5	14.35±0.25	32±0.5	8.5±0.2	23.5min
PQ35/30	1	35.1±0.6	14.9±0.2	26.0±0.5	14.35±0.25	32.0±0.5	10.0±0.2	23.5min
PQ35/33	1	35.1±0.6	16.5+0/-0.25	26.0±0.5	14.35±0.25	32.0±0.5	11.5±0.2	23.5MIN
PQ35/35D	1	35.1±0.6	17.4±0.2	26.0±0.5	14.35±0.25	32.0±0.5	12.5±0.2	23.5MIN
PQ36/22.2/26A	8	36±0.6	11.1±0.15	26±0.5	18±0.4	29.5min	6.9±0.15	18.57min
PQ36/35/26	1	36±0.55	17.4±0.1	26±0.5	14.5+0/-0.4	33±0.5	12.5±0.1	24.3min
PQ38/11B	2	38±0.65	5.7±0.15	21.32±0.4	14.3±0.25	32.8±0.65	2.7±0.15	25.84min
PQ38/13I	2	38±0.65	6.5±0.15	21.32±0.4	14.3±0.25	32.8±0.65	3.5±0.2	25.84min
PQ38/14.2/21.3A	2	38±0.65	7.1±0.15	21.32±0.4	14.3±0.25	32.8±0.65	4.1±0.15	25.84min
PQ38/13.7/26.4B	9	38±0.65	7.05±0.1	26.4±0.5	8.4±0.2	34.2±0.65	4.3±0.15	17±0.25
PQ38/16/21.3B	2	38±0.65	8±0.15	21.32±0.4	14.3±0.25	32.8±0.65	4.6+0.2/-0.1	26.5±0.65
PQ39/20/20A	7	38.7±0.6	9.75±0.2	19.6±0.4	14.8±0.3	31.7+0.7/-0.5	5.35±0.2	26+0.8/-0.4
PQ39.5/20.3/32.5B	5	39.5±0.6	10.15±0.15	32.5±0.6	19±0.35	36±0.65	6.65±0.25	22.3min
PQ40.5/30.9/27.9	1	40+1.4/-0.4	15.43±0.12	28+0.45/-0.6	15+0/-0.6	36.4min	10.28±0.15	27.2min
PQ40/13.5/21	2	40±0.5	6.75±0.2	21±0.25	14.2±0.2	32.6min	3.7±0.2	26.4min
PQ40/25	1	40.0+1.4/-0.4	12.5±0.15	28+0.45/-0.6	15.0+0/-0.6	36.4min	7.25±0.2	27.2min
PQ40/30	1	40.0+1.4/-0.4	15.13±0.12	28.0+0.45/-0.6	15.0+0/-0.6	36.4min	9.98±0.15	27.2min
PQ40/40A	1	40.0+1.4/-0.4	20.0+0/-0.25	28.0+0.45/-0.6	15.0+0/-0.6	36.4min	14.6+0.3/-0	27.2min
PQ40/7	2	40±0.5	6.5±0.2	21±0.25	14.2±0.2	32.6min	3.45±0.2	26.4min
PQ40.5/23.6/28	1	40.5±0.8	11.8+0.1/-0.15	28±0.6	15+0/-0.6	37±0.8	6.65±0.15	27.2min

C1	Ae	Le	Amin	Ve	AL(±25%)				重量 g / PRS
					TP4	TP4A	TP4W	TPW33	
0.38	182.89	68.83	161.73	12587.6	5500	5600	6700	7200	65.32
0.38	184.21	70.72	161.73	13027	5300	5500	6600	7100	67.60
0.42	182.93	77.18	161.73	14118	5000	5100	6200	6600	73.27
0.46	182.70	83.73	161.73	15296.7	4600	4800	5800	6200	79.38
0.48	182.96	88.17	161.73	16130.7	4400	4600	5500	6000	83.71
0.22	259.83	56.71	246.06	14734.17	9700	10000	11000	12000	76.46
0.49	181.12	89.23	160.61	16160.8	4400	4500	5400	5900	83.87
0.33	130.60	43.00	96.89	5601	4700	4800	5700	6000	29.07
0.34	133.40	46.02	96.92	6138.9	4500	4600	5400	5800	31.86
0.36	134.12	48.62	96.92	6520.2	4300	4400	5200	5600	33.84
0.32	142.09	44.15	112.25	6273.3	5300	5500	6400	6900	34.80
0.36	144.82	52.34	108.23	7580	4500	4700	5500	5900	39.34
0.33	176.08	57.74	142.61	10167.1	5500	5700	6800	7300	52.76
0.19	278.79	52.63	227.50	14673	9500	9800	11600	12400	76.15
0.42	198.53	83.99	169.72	16675.1	4900	5000	6000	6500	86.54
0.35	137.73	47.59	98.92	6554	4400	4600	5400	5800	34.01
0.35	200.15	70.87	169.72	14184.8	5600	5800	6900	7400	73.61
0.42	198.53	82.68	169.72	16414.5	4900	5100	6100	6600	85.18
0.52	198.03	103.55	169.72	20505.6	4100	4200	5100	5500	106.41
0.34	137.09	46.58	98.92	6385.5	4500	4700	5500	5800	33.14
0.33	206.14	67.47	176.71	13908.1	6100	6300	7500	8000	72.18

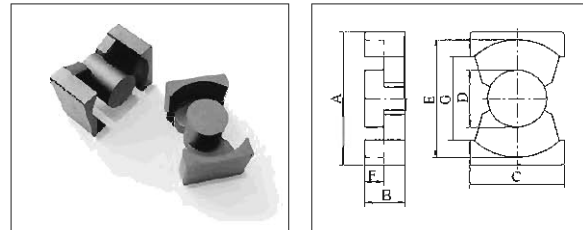


FIG.1

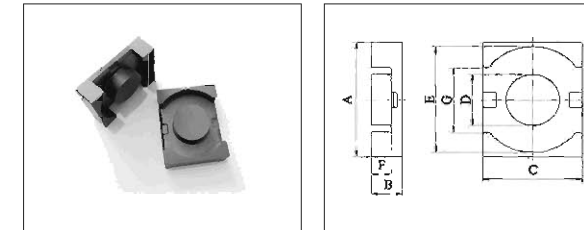


FIG.6

**PQ 型 / PQ Core**

型号 TYPE	图例 FIG.	尺寸 Dimensions ( mm )						
		A	B	C	D	E	F	G
PQ40.5/30.3/28A	1	40.5±0.9	15.15±0.1	28±0.6	14.9±0.3	37±0.6	10±0.15	27.8min
PQ40.5/30/28A	1	40.5±0.7	15±0.2	27.8±0.4	14.9±0.3	37±0.6	9.85±0.2	28min
PQ40.5/35/28	1	40.5±0.7	17.5±0.2	28+0.45/-0.6	14.8±0.3	37±0.6	12.35±0.2	27.2min
PQ40.5/35/28A	1	40.5±0.7	17.5±0.2	28+0.45/-0.6	14.8±0.3	37±0.6	12.35±0.2	27.8min
PQ40.5/39.3/28	1	40.5±0.9	19.65±0.1/-0.15	28±0.6	14.9±0.3	37±0.6	14.65±0.15	28min
PQ40.5/39/28A	1	40.5±0.9	19.5±0.1/-0.15	28±0.6	14.9±0.3	37±0.6	14.5±0.15	27.8min
PQ40/25B	1	40.5±0.9	12.5±0.15	28+0.45/-0.6	14.9±0.3	36.4min	7.25±0.2	28min
PQ40/40N	1	40.5±0.9	19.9±0.15	28±0.6	14.9±0.3	37±0.6	14.75±0.15	28min
PQ45/23A	5	45.8±0.7	11.3±0.15	37.5±0.5	21.5±0.5/-0	41.5±0.6	7±0.3	
PQ50/50B	1	50±0.7	25±0.15	32±0.6	20±0.35	44±0.7	18.1±0.25	32min
PQ65/60/40	1	65±1	30±0.45	40±0.7	26±0.45	53±1	21±0.5	40±0.8

C1	Ae	Le	Amin	Ve	AL(±25%)				重量 g / PRS
					TP4	TP4A	TP4W	TPW33	
0.41	203.38	82.65	174.37	16809.4	5100	5200	6300	6800	87.23
0.41	188.10	77.02	171.79	14487.08	5300	5500	6600	7100	75.18
0.46	202.70	92.66	172.03	18783	4500	4700	5700	6100	97.47
0.46	201.86	92.94	172.03	18760.1	4500	4700	5600	6100	97.36
0.51	201.56	102.72	174.37	20703.6	4200	4400	5300	5700	107.44
0.51	186.46	95.29	166.12	17766.67	4300	4400	5300	5800	92.20
0.35	201.71	71.08	174.37	14336.7	5700	5900	7100	7600	74.40
0.51	203.37	103.46	174.37	21041.5	4200	7300	5200	5700	109.19
0.16	376.11	58.54	322.50	22017.9	12400	12900	15200	16300	114.26
0.36	318.84	114.87	314.16	36624.2	6900	7100	8700	9400	190.06
0.23	578.68	135.46	530.93	78390.3	10100	10500	12700	13800	406.81